

COMPANY INTRODUCTION

'More than protection...'

WRS Cathodic

'More than protection...'



WRS Cathodic protection has more than two decades experience in corrosion prevention.

Since 1994 WRS has been acknowledged for its vast engineering expertise within the offshore and marine industry and provides the following products and services:

- Sacrificial anodes (zinc, aluminum, magnesium)
- Impressed current cathodic protection systems and services (ICCP)
- Marine growth Prevention Systems and services (MGPS) to prevent fouling by using copper anodes
- Potential Measurements
- Cathodic protection services like anode mapping and calculation, pre-dock inspections, ICCP/MGPS services and installation, log sheet analysis.





Material Data Sheet: Aluminium Alloy MSDS-001



| Composition and Information on Elements | | | | | | | | | | |
|---|----------------------|-------------------|------------------------|-----------------|-------------------|-------------------|--|--|--|--|
| Aluminium Alloy Elements % | A-Guard [®] | G3 | MIL-DTL- 24779A(SH) | DNV-RP-B401 | ISO 15589-2 | NORSOK M-503 | | | | |
| Zinc | 4.000% - 5.000% | 2.500% - 0.500% | 4.000% - 6.500% | 2.500% - 5.750% | 2.500% - 5.750% | 2.500% - 5.750% | | | | |
| Indium | 0.015% - 0.020% | 0.010% - 0.020% | 0.014% - 0.020% | 0.015% - 0.040% | 0.016% - 0.040% | 0.015% - 0.040% | | | | |
| Silicon | 0.080% - 0.120% | 0.080% - 0.150% | 0.080% - 0.200% | max. 0.120% | max. 0.120% | max. 0.100% | | | | |
| Iron | max. 0.090% | max. 0.120% | max. 0.090% | max. 0.090% | max. 0.090% | max. 0.090% | | | | |
| Copper | max. 0.003% | max. 0.006% | max. 0.004% | max. 0.003% | max. 0.003% | max. 0.003% | | | | |
| Mercury | - | - | max. 0.001% | - | - | - | | | | |
| Tin | - | - | max. 0.001% | - | - | - | | | | |
| Cadmium | - | - | - | max. 0.002% | max. 0.002% | - | | | | |
| Others | max. 0.100% | max. 0.020% (ea.) | max. 0.100% | - | max. 0.020% (ea.) | max. 0.020% (ea.) | | | | |
| Aluminium | Remainder | Remainder | Remainder | Remainder | Remainder | Remainder | | | | |

Physical and Chemical Properties

Physical state and appearance: Solid. Specific Gravity: Density: 2.7 (Water = 1)

Odour: Odourless.Vapour Pressure: Not applicable.Taste: Not available.Vapour Density: Not available.

Molecular Weight: 2700 - 2750 kg/m³ **Volatility:** Not available.

Colour: Silver-white Odour Threshold: Not available.

pH (1% soln/water): Not applicable.

Boiling Point: 2327°C (4220.6°F)

Melting Point: 660°C (1220°F)

Dispersion Properties: Not available.

Critical Temperature: Not available.

Solubility: Insoluble in cold water, hot water. Soluble in alkalies, Sulphuric acid, Hydrochloric acid. Insoluble in concentrated Nitric Acid, hot Acetic

acid.

QUALITY ASSURANCE ISO 9001:2015 3.1 CERTIFICATE ACCORDING TO BS EN

10204:2004



Program: AL-01

Comment: Al-alloys global AL-114176

Single spark (s)

Elements: Concentration

01/02/2018


Cast No: A09181 & A10181 Sample id: PO-1850001

| No Si | Fe | Cu | Mn | Mg | Zn | Ni | Cr |
|-----------|---------|-------|-------|-------|---------|---------|---------|
| % | % | % | % | % | % | % | % |
| 1 0.028 | 0.078 | 0.001 | 0.001 | 0.001 | 3.68 | <0.002 | < 0.001 |
| 2 0.028 | 0.075 | 0.001 | 0.001 | 0.000 | 3.58 | < 0.002 | < 0.001 |
| 3 0.026 | 0.073 | 0.001 | 0.001 | 0.000 | 3.69 | <0.002 | < 0.001 |
| No Pb | Sn | Ti | Ag | В | Be | Bi | Ca |
| % | % | % | % | % | % | % | % |
| 1 <0.002 | <0.002 | 0.002 | 0.000 | 0.001 | 0.000 | <0.002 | 0.002 |
| 2 <0.002 | <0.002 | 0.002 | 0.000 | 0.000 | 0.000 | <0.002 | 0.003 |
| 3 < 0.002 | < 0.002 | 0.002 | 0.000 | 0.000 | 0.000 | < 0.002 | 0.002 |
| No Cd | Na | Sr | Li | Zr | Co | V | Ga |
| % | % | % | % | % | % | % | % |
| 1 0.001 | 0.001 | 0.000 | 0.000 | 0.000 | < 0.001 | 0.001 | 0.001 |
| 2 0.001 | 0.000 | 0.000 | 0.000 | 0.000 | < 0.001 | 0.001 | 0.001 |
| 3 0.001 | 0.000 | 0.000 | 0.000 | 0.000 | <0.001 | 0.001 | 0.001 |
| No Al | in | Р | | | | | |
| % | % | % | | | | | |
| 1 96.154 | 0.024 | 0.002 | | | | | |
| 2 96.177 | 0.022 | 0.002 | | | | | |
| 3 96.185 | 0.023 | 0.002 | | | | | |
| 5 30.100 | 0.020 | 0.002 | | | | | |

Office and warehouse in the Netherlands

Services all over the world...



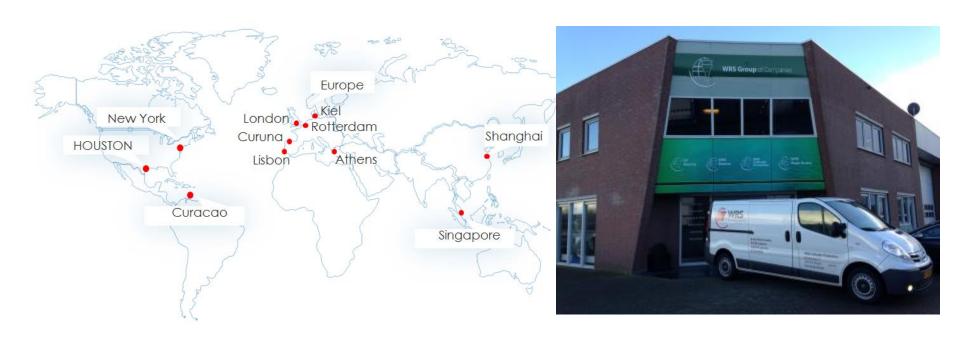

WRS CATHODIC PROTECTION BV

EDISONWEG 12

3291 CK STRIJEN

THE NETHERLANDS

ICCP





MGPS

SACRIFICIAL ANODES



Impressed current cathodic protection ICCP



Impressed current cathodic protection systems are since many years a perfect solution to control corrosion issues at hulls.

The ICCP system can be easily installed on any type of vessel. A complete installation consist a number of ICCP anodes, reference electrodes and a power unit to control the system. An optimum and controlled balance of DC currents which will be send trough the water leads to the prevention of galvanic corrosion.

WRS is able to deliver impressed current systems and services all over the world.

Impressed current cathodic protection *ICCP*





Impressed current cathodic protection ICCP



Cathodic protection surveys

During dry-docking or afloat our services engineers can assist in:

- Visual inspection of hull structure (corrosion, pritting, structure)
- Inspection of spareparts and/or anodes (ICCP/Sacrificials)
- Impressed Current system inspection, installation and calibration
- Supervision and assistance in installation process



Marine growth prevention systems *MGPS*



Fouling in seawater cooling systems is a major problem. To avoid and reduce fouling a Marine growth Prevention Systems (MGPS) is very common technique in the maritime industry.

By using specially alloyed anodes and a power supply the cooling water lines will be protected against marine growth. WRS can provide all types of Copper and Aluminum anodes for installation in the sea chests, strainers and box coolers.

Sacrificial Anodes

Zinc, Aluminum, Magnesium



WRS Cathodic protection offers a wide range of sacrificial anodes which are manufactured in a high end and qualified production facility.

WRS warehouse is located close to Rotterdam, which means a fast delivery option towards Rotterdam, Amsterdam and Antwerp.





Sacrificial Anodes

Zinc, Aluminum, Magnesium



Sacrificial hull Anodes

For external use

Sacrificial tank Anodes

For internal use/ballast tanks

Sacrificial offshore Anodes

For protection of offshore structures, platforms, rigs, pipelines, jetties

Magnesium Anodes Magnesium anodes

For onshore use and fresh water cathodic protection applications

Mounting Material (e.g. M-Clamps)










Quality control



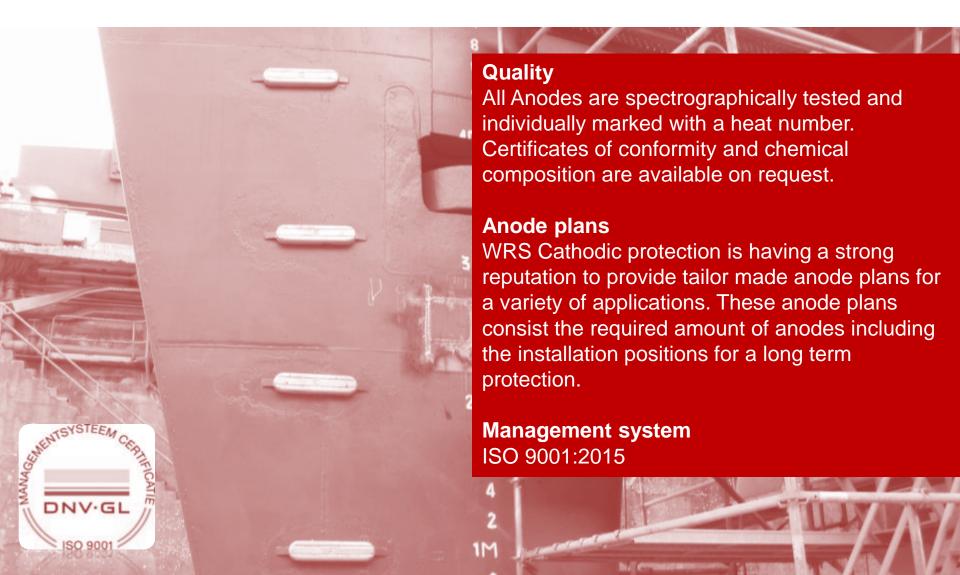

References

Since 1994...















































Please contact us for questions or enquiries

Mr. Jan Seton +31 6 53 41 53 70

www.wrscathodic.com

info@wrscathodic.com - logsheets@wrscathodic.com - finance@wrscathodic.com